

PATENT APPLICATION

Box Patent Application
Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Transmitted herewith for filing under 35 U.S.C. 1.111 and
37 C.F.R. 1.53 is the patent application of:

Applicants: Mr. William Riley

Title: Optical Isolation Apparatus And Method

Atty. Docket No.: 08266-0197

Enclosed are:

☒ Specification (15 pages)
☒ Claims (69 claims)
☒ Drawings (7 sheets)
☒ Abstract
☐ Declaration and Power of Attorney
☐ An assignment of the invention to _____
☐ Statement(s) of Status as Small Entity
☒ Check to cover the total fees for filing this application as calculated below
☐ Recordation Form Cover Sheet
☐ Check to cover \$40 fee for recording assignment
☐ Claim of Priority
☐ Priority Document
☐ Information Disclosure Statement
☒ Form PTO-1449
☒ Copies of Cited References
☐ Preliminary Amendment

Certificate Under 37 C.F.R. 1.10

Express Mail Label No.: EM475053688USDate of Deposit: February 29, 2000

I hereby certify that this paper or fee is being deposited with
the United States Postal Service' "Express Mail Post Office
to Addressee" service under 37 C.F.R. 1.10 on the date
indicated above and is addressed to the Assistant
Commissioner for Patents, Washington, D.C. 20231.

Nancy Brant

Typed or Printed Name of Person Mailing Paper or Fee

Signature of Person Mailing Paper or Fee

CLAIMS AS FILED

CLAIMS AS FILED					
	NUMBER FILED		NUMBER EXTRA	RATE	FEE
BASIC FEE (37 C.F.R. 1.16 (a))				\$690	\$690
TOTAL CLAIMS (37 C.F.R. 1.16(c))	69 - 20 =	* 49		x\$18	\$882
INDEPENDENT CLAIMS (37 CFR 1.16(b))	4 - 3 =	* 1		x\$78	\$78
MULTIPLE DEPENDENT CLAIM PRESENT	(37 C.F.R. 1.16(d))			\$260	
* NUMBER EXTRA MUST BE ZERO OR LARGER				TOTAL	\$1,650
If applicant has small entity status under 37 C.F.R. 1.9 and 1.27, then divide total fee by 2, and enter amount here.				SMALL ENTITY TOTAL	

FEE FOR RECORDING ASSIGNMENT
TOTAL FEES

\$1,650

The Commissioner is hereby authorized to charge any additional filing fees under 37 C.F.R. 1.16 or processing fees under 37 C.F.R. 1.17 which
may be required, or credit any overpayment, to Bose McKinney & Evans LLP's Deposit Account No. 02-3223. A duplicate copy of this sheet is
enclosed.

Attorney of Record

Printed Name: Paul E. Franz

Registration No.: P45,910

PATENT APPLICATION
of
William Riley
for
OPTICAL ISOLATION APPARATUS AND METHOD
N1-9446
Attorney Docket 08266-0197

OPTICAL ISOLATION APPARATUS AND METHOD

Field of the Invention

This invention relates to isolation devices and more particularly to
5 isolation devices which use an optical channel to isolate a remote circuit from a source circuit.

Background of the Invention

In certain environments it is necessary to establish substantial electrical
10 isolation between electrical control and power circuits. An example of such an environment is an electric hospital bed. Bed motion control circuits are often found in side rails, footboards, headboards, and in pendants connected via an umbilical cord to the motor power circuits. Metal and other conductive surfaces may be incidentally contacted by patients, caregivers, and even critical care equipment. When contact is
15 made, a potential hazard exists if the conductive surface provides a path for current flow to earth ground. For this reason, regulatory bodies impose strict requirements on patient connected equipment and identify equipment in regard to its insulation abilities.

Having non-isolated electrical control circuitry in exposed areas such
20 as side rails and footboards, presents a challenge to design engineers. It is known to provide power to a remote isolated circuit with an isolated power supply and send optically isolated control signals from the remote isolated circuit to the local source circuit which controls actuators powered by a non-isolated power supply. Signals generated by the remote isolated circuit are optically transmitted to the local source
25 circuit and power to the remote isolated circuit is provided through bulk cables from the isolated power supply. However, isolated power supplies can be very costly.

Summary of the Invention

The optical isolation device of the present invention transmits power
30 from a power supply on a local source circuit optically along an optical channel to a remote isolated circuit. Signals generated by the remote isolated circuit are optically

transmitted to a local source circuit which controls various actuators. Thus the remote isolated circuit is completely electrically isolated from the local source circuit.

An optical isolation device for transmitting power to and signals from an isolated electrical device in accordance with the present invention includes a light
5 source for generating light, an optical channel having a first end on which the light impinges and a second end optically coupled to the first end, and an opto-electrical detector adjacent the second end producing electrical power to drive the isolated electrical device when impinged upon by the light. An optical signal generator
10 generates optical signals in response to input provided by the isolated electrical device, the optical signals impinge upon the second end of the optical channel and are transmitted to an opto-electrical sensor adjacent the first end of the optical channel that generates electrical signals in response to the optical signals. The light and optical signals are both propagated through the optical channel.

Also in accordance with the invention is an opto-electric device
15 including a first circuit having a first light source, a second circuit having a second light source, and a photovoltaic cell configured to provide energy to at least a portion of the second circuit. An optical channel couples the first and second circuits, and light from the first light source is transmitted to the photovoltaic cell over the optical channel, and light from the second light source is transmitted to the first circuit over
20 the optical channel.

A method of the present invention for electrically isolating a remote circuit from a source circuit includes the steps of generating a first light signal in the source circuit, optically coupling the first light signal to the remote circuit so that the remote circuit receives the first light signal from the source circuit, generating power
25 in the remote circuit from the first light signal received by the remote circuit, and powering the remote circuit by the generated power.

Additional features and advantages of the present invention will become apparent to those skilled in the art upon consideration of the following detailed description of illustrated embodiments exemplifying the best mode of
30 carrying out the invention as presently perceived.

Brief Description of the Drawings

Fig. 1 is a diagrammatic view of an optical isolation device according to the present invention optically coupling and electrically isolating a local source circuit depicted on the right of the drawing and a remote isolated circuit depicted on the left of the drawing showing a light source and a opto-electrical sensor of the device coupled electrically to local source circuit and optically by an optical channel to an opto-electrical detector and optical signal generator which are electrically coupled to the remote isolated circuit, high intensity light generated by light source impinges upon a first end of the optical channel and propagates along the channel exiting through a second end of the optical channel where it impinges upon the opto-electrical detector, power generated by opto-electrical detector is stored in a power storage device which supplies power to the remote isolated circuit and the optical signal generator, optical signal generator generates an optical signal that is transmitted along the optical channel so that the opto-electrical sensor adjacent to the first end is impinged upon by the optical signal;

Fig. 2 is a block diagram of a half-duplex, single channel fiber optic isolation device in accordance with the present invention showing a local source circuit optically coupled to and electrically isolated from a remote isolated circuit by a single fiber optic filament and also showing controller and memory elements on a source side and an isolated side of the device to facilitate half-duplex operation;

Fig. 3 is a block diagram of a full-duplex, dual channel fiber optic isolation device in accordance with the present invention showing a local source circuit optically coupled to and electrically isolated from a remote isolated circuit by a first fiber optic optical channel through which high intensity light is transmitted from a light source powered by a local source circuit to power remote isolated circuit and a second fiber optic optical channel through which low intensity light signals are transmitted responsive to electrical signals generated by the remote isolated circuit to the local source circuit;

Fig. 4 is a block diagram of a full-duplex, single optical channel isolation device in accordance with the present invention showing a local source circuit optically coupled to and electrically isolated from a remote isolated circuit by a single optical channel, a high intensity light source on a source side of the device

coupled to an opto-electrical detector on an isolated side of the device through the optical medium, and a low intensity light source on the isolated side of the device optically coupled to an opto-electrical sensor on the source side of the device through the optical medium;

- 5 Fig. 5 is a diagrammatic view of the optical channel, opto-electrical detector, isolated side memory and controller components, and optical signal generator of the half-duplex, single channel fiber optic isolation device of Fig. 4 and the remote isolated circuit showing a photovoltaic cell serving as an opto-electrical detector for detecting high intensity light and generating power to be stored in the storage device for powering the components on the remote isolated circuit and optical signal generator, a user interface for providing input to devices on the local source circuit, a clock, an on/off detector for determining when high intensity light is and is not being received, a low intensity light source such as an LED acting as optical signal generator for transmitting optical signals indicating the state of the user interface
- 10 based on state information stored in state registers and shift registers and converted to electrical signals by an LED driver;
- 15

- Fig. 6 is a diagrammatic view of the optical channel, high intensity light source, source side memory and controller components, and opto-electrical sensor of the half-duplex, single channel fiber optic isolation device and the local source circuit of Fig. 4 showing a power supply powering the various components of the source side of the device and the local source circuit and also showing the opto-electrical sensor receiving the optical signals from the remote isolated circuit and converting them to electrical signals, a synchronizer for controlling the duty cycle of the high intensity light source and the opto-electrical sensor, a serial input register for storing the electrical signals, and a state register for communicating the stored electrical signals to a controller controlling devices on the local source circuit; and,
- 20
- 25

- Fig. 7 is a block diagram of a full-duplex, fiber optic isolation device in accordance with the present invention showing a light source generating light at a first wavelength which light is optically transmitted along a fiber optic filament to be refracted by a lens to impinge upon an opto-electrical detector sensitive in a bandwidth including the first frequency, and an optical signal generator producing optical signals centered about a second frequency which optical signals are refracted
- 30

by the lens and optically transmitted along the fiber optic filament to impinge upon an opto-electrical sensor sensitive in a bandwidth including the second frequency but not the first frequency.

5 Detailed Description of the Drawings

An optical isolation device 10 according to the present invention is illustrated in Fig. 1. Optical isolation device 10 optically couples and electrically isolates various components on a local source circuit 36 from components on a remote isolated circuit 30. Optical isolation device 10 includes a light source 12, an opto-electrical sensor 20, an optical channel 14, an opto-electrical detector 16, and an optical signal generator 18 and may also include a lens 46 (shown in phantom lines in Fig. 1) and an electrical energy storage device 38 such as a capacitor 40 (shown in phantom lines in Fig. 1). Energy storage device 38 aids in providing a steady potential difference from which a user interface circuit 56 and other components of remote isolated circuit 30 may be powered. Other electrical storage devices 38 such as rechargeable batteries or power cells are also within the teaching of the invention. Energy storage device 38 is electrically coupled to opto-electrical detector 16 which in the illustrated embodiment is a photovoltaic cell 42.

Illustratively, local source circuit 36 includes a power source 50 for driving light source 12 and powering opto-electrical sensor 20 of optical isolation device 10, a controller 52 for receiving electrical signals generated by sensor 20 in response to optical signals 32 and generating control signals for actuators, and actuators 54. Remote isolated circuit 30 includes a user interface 56 and an electrical signal generator 58 powered by electricity produced by the opto-electrical detector 16 of optical isolation device 10. Electrical signal generator 58 produces electrical signals triggered by user interface 56 and is coupled to the optical signal generator 18 of device 10 which converts the electrical signals to optical signals 32. In the illustrated embodiment, optical signal generator 18 includes light emitting diode ("LED") 44. However it should be understood that other sources for generating optical signals may be used within the teaching of the invention. Optical signals 32 are propagated along optical channel 14 between remote isolated circuit 30 and local source circuit 36.

Illustratively, light source 12 and opto-electrical sensor 20 are on a source side 11 of optical isolation device 10 which is optically coupled by optical channel 14 with isolated side 13 of optical isolation device 10. Illustratively, isolated side 13 of optical isolation device 10 includes lens 46, opto-electrical detector 16,
 5 optical signal generator 18, and storage device 38.

Optical channel 14, such as a fiber optic filament 15, includes a first end 24 communicating with light source 12 and opto-electrical sensor 20 and a second end 28 communicating with opto-electrical detector 16 and optical signal generator 18. Light source 12 is electrically coupled to power supply 50. Source side 11 and
 10 isolated side 13 of device 10 are isolated electrically from one another by optical channel 14, yet may transmit optical signals 32 and light 22 between one another. Optical isolation device 10 is electrically coupled at source side 11 by power line 25 and signal line 27 to a local source circuit 36 (See Fig. 1) including power supply 50, control circuitry 52, and actuators 54. Likewise, optical isolation device 10 is
 15 electrically coupled at isolated side 13 by power line 29 and signal line 31 to remote isolated circuit 30 including power consuming devices such as user interface 56 and electrical signal generator 58.

Light 22 generated by light source 12 impinges upon first end 24 of optical channel 14 and is transmitted in a first direction 26 along optical channel 14
 20 exiting through second end 28 of optical channel 14 to impinge upon opto-electrical detector 16. While the term light may be strictly defined as visible light having a wavelength in the visible spectrum (i.e. $\sim 0.4 \mu\text{m}$ - $\sim 0.76 \mu\text{m}$), as used in this application such light will be referred to as visible light and the term light and similar terms and prefixes such as optical, opto- and photo- shall be deemed to include
 25 electromagnetic radiation in the near ultraviolet, visible, and near infrared spectrums. Opto-electrical detector 16 produces electricity when impinged upon by light 22.

As shown, for example, in Fig. 1, opto-electrical detector 16 is electrically coupled by power line 29 to remote isolated circuit 30 which is powered by the electricity generated by opto-electrical detector 16 in response to being
 30 impinged upon by light 22. Remote isolated circuit 30 is also electrically coupled by signal line 31 to optical signal generator 18 which generates optical signals 32 in response to electrical signals received from remote isolated circuit 30.

Optical signals 32 impinge upon second end 28 of optical channel 14 and are transmitted in a second direction 34 along optical channel 14 exiting through first end 24 to impinge upon opto-electrical sensor 20. Opto-electrical sensor 20 produces electrical signals in response to being impinged upon by optical signals 32.

- 5 Illustratively, opto-electrical sensor 20 is electrically coupled by signal line 27 to local source circuit 36 which performs tasks in response to electrical signals generated by opto-electrical sensor 20. Thus, remote isolated circuit 30 is completely electrically isolated from, but in communication with and powered by, local source circuit 36.

Illustratively, opto-electrical detector 16 is a photovoltaic cell 42.

- 10 Photovoltaic cell 42 self-generates electricity only when being impinged upon by light 22. The potential difference or output voltage generated by photovoltaic cell 42 is a function of the intensity of light 22 impinging upon the junction of photovoltaic cell 42. The use of photovoltaic cell 42 as opto-electrical detector 16 eliminates the need for inclusion of another power source in remote isolated circuit 30 or on isolated side 13 of isolation device 10 because it self-generates electricity. Other self-generating
15 opto-electrical sensors 16 or photonic devices that generate electricity when impinged upon by light 22 are within the teaching of the invention. Also, while illustrated as a single photocell 42, it is within the teaching of the disclosure for opto-electrical detector 16 to include an array of photovoltaic cells and/or other self-generating opto-
20 electrical detectors 16 or photonic devices.

- Each embodiment of optical isolation device disclosed herein includes substantially all of the elements described above. In general each functions by converting electrical energy supplied by a power supply 50 in the local source circuit 36 to light 22 which is transmitted to the isolated side 13 where light 22 is
25 transformed to electrical power for powering components of isolated side 13 and remote isolated circuit 30. Remote isolated circuit 30 generates electrical signals which are converted to optical signals 32 which are transmitted to the source side 11 where they are converted to electrical signals which are used to control components of the local source circuit 36.

- 30 It will be understood that light 22 impinging upon first end 24 of optical channel 14 will be partially reflected forming reflected light 23 and partially transmitted as transmitted light 22. Reflected light 23 may impinge upon opto-

electrical sensor 20 swamping out optical signals 32 or interfering with optical signals 32. The various embodiments disclosed herein differ in the means by which they prevent reflected light 23 from swamping out or interfering with optical signals 32.

Referring to Figs. 2, 5 and 6, a half-duplex, single channel fiber optic isolation device 110 includes an electrical storage device 38 shown as a capacitor 40. Energy storage device 38 is electrically coupled to opto-electrical detector 16 which in the illustrated embodiment is a photovoltaic cell 42. Half-duplex, single channel fiber optic isolation device 110 requires only a single optical transmission path, shown as fiber optic filament 15. Remote isolated circuit 30 is electrically isolated from the local source circuit 36. In a medical device application, remote isolated circuit 30 would be connected or enable direct exposure to a patient or caregiver. Local source circuit 36, isolated from patient and caregiver, is in direct electrical contact with high voltage power circuits such as motor drivers and mains potentials 60. This configuration allows for communications between remote isolated circuit 30 and local source circuit 36 in one direction 26 or 34 at a time, i.e. half-duplex operation.

As previously mentioned, energy storage device 38 aids in providing a steady potential difference from which remote isolated circuit 30 and components of isolated side 13 of an optical isolation device 10 may be powered. Storage device 38 is charged by current flowing from photovoltaic cell when light 22 passes through lens 46 and optical channel 14 from light source 12. Illustratively, a diode 62 is associated with the storage device 38 to ensure that current flows only in one direction. Thus by including electrical storage device 38 in half-duplex, single channel fiber optic isolation device 110, the need for constant illumination of opto-electrical sensor 16 at a constant intensity is reduced. In fact, inclusion of electrical storage device 38 permits light source 12 to be intermittently turned off so that light source 12 can have a defined duty cycle. The duty cycle of light source 12 includes an on-cycle and an off cycle.

One advantage of being able to turn off light source 12 intermittently is that during the off cycle of the light source 12, optical signals 32 from optical signal generator 18 may be transmitted along a single fiber optic filament 15. In order to generate sufficient electrical power to drive the remote isolated circuit 30, it is desirable that light source 12 be a high intensity light source. In the illustrated

embodiment light source 12 is a semiconductor laser 48 but may be some other type of laser or high intensity light source such as a flash lamp, strobe lamp, incandescent lamp or the like. As with any light impinging upon the boundary between two media having differing refractive indices, the high intensity light 22 impinging upon first end 5 24 of fiber optic filament 15 is partially refracted and partially reflected. The refracted light 22 enters fiber optic filament 15 at an angle inducing total internal reflection of the refracted light 22 at the cladding of fiber optic filament 15. The reflected light 23 may impinge upon opto-electrical detector 20.

To achieve complete electrical decoupling of remote isolated circuit 30 10 from local source circuit 36, it is desirable to generate optical signals 32 using little electrical power. Thus the intensity of optical signals 32 generated by optical signal generator is often very small compared to the intensity of light 22 generated by light source 12. Therefore, it is likely that the intensity of reflected light 23 generated by light source 12 which is reflected from the first end 24 of fiber optic filament 15 may 15 be substantially greater than the intensity of optical signals 32 generated by the optical signal generator 18 which impinge upon opto-electrical sensor 20. If both light source 12 and optical signal generator 18 produce light having a bandwidth centered around the same frequency, reflected light 23 impinging upon the opto-electrical detector 20 could easily swamp out optical signal 32 impinging upon detector 20. Also with 20 reflected light 23 and optical signals 32 at the same frequency the possibility of destructive interference arises. To eliminate concerns about swamping out of or interference with optical signals 32 by reflected light 23 from light source 12, fiber optic isolation device 110 includes a controller 170 which creates a duty cycle for light source 12 and causes optical signals 32 to be generated by optical signal 25 generator 18 and opto-electrical sensor 20 to be responsive to light impinging upon it only during the off cycle of light source 12. Also memory elements 172 are provided on source side and isolated side to store data for creating optical signals 32 or received from optical signals 32. Since optical signals 32 are generated only when light source 12 is off, there is no possibility of interference between reflected light 23 and optical 30 signal 32, and reflected light 23 cannot swamp out optical signal 32.

Controller 170 includes an on/off detector 174 and a clock 176 on isolated side 13 of device 110 and a synchronizer 178 on source side 11 of device 110.

Illustratively, memory elements 172 include a state register 180 and shift register 182 on isolated side 13 of device 110 and an asynchronous serial input register 184 and a state register 186 on source side 11 of device 110. On/off detector 174 is a high input impedance monitoring device that detects when high intensity light 22 is present at photovoltaic cell 42. When light source 12 is OFF so that no light 22 impinges on photovoltaic cell 42, an enabling signal is sent to shift register 182 as a signal for it to send the contents of the state register 180 to the driver 168 and optical signal generator 18. Shift register 182 is an asynchronous serial communications circuit similar to, but not necessarily limited to, the standard RS232 communications protocol circuits. State register 180 collects and makes available to shift register 182 the current state of user interface 56. User interface 56 can be switches indicating an open/closed condition, levers indicating directional states, digitized outputs of potentiometers, or digitized outputs of position sensing devices as well as other condition and state indicating devices. On/Off detector 174, shift register 182, and state register 180 can be created from discrete components (IC's) or be functions of software in a micro-controller 188 (shown in phantom lines in Fig. 5).

As shown in Fig. 6, source side 11 of device 110 includes a high intensity light source 12 focused on optical channel 14 which illustratively is fiber optic cable 15. Synchronizer 178 is used to periodically turn light source 12 off and on and to indicate to the asynchronous serial input register 184 that data may be coming in.

During the periods that high intensity light source 12 is off, remote isolated circuit 13 may send data via optical signals 32 at low intensity light levels in a serial protocol fashion. Opto-electrical detector 20 is a low intensity light receiver such as a photo-transistor 64 which will detect the incoming data stream carried by optical signals 32 and convert it to electrical impulses to be sent to the asynchronous serial input register 184. Once the serial data is received and converted to parallel data, the information is passed to state register 186 which makes the data available to other systems, such as controller 52 for actuators 54 in local source circuit 36, as needed. In the example mentioned earlier, the state data could be used by motor driver circuits for moving the platform surfaces of a hospital bed. Optionally, synchronizer 178, asynchronous serial input register 184, and state register 186 could

be functionally provided by software and a micro-controller 190 (shown in phantom lines in Fig. 6).

Referring to Fig. 3, there is shown a full-duplex, dual channel fiber optic isolation device 210. Full-duplex, dual channel fiber optic isolation device 210 includes a light source 12, a power fiber optic filament 215 having a first end 224 and a second end 228, a dispersion lens 46 adjacent the second end 228, an opto-electrical detector 16, an optical signal generator 18, a signal fiber optic filament 217 having a first end 225 and a second end 227, an opto-electrical sensor 20 adjacent first end 225 of signal fiber optic filament 217, and a shield 261 disposed between light source 12 and first end 224 of power fiber optic filament 215 and opto-electric detector 20. With the addition of a second optical channel, communications in both directions can occur simultaneously, i.e. full-duplex operation. This results in improved rates of state data transfer to the end user. Energy storage device 38 in isolated side 13 of device 210 is reduced to minimum capacity size since light source 12 is never in the OFF state. Also, circuitry required for synchronization of optical signal generator 18, opto-electrical sensor 20 and light source 12 is not required.

Light source 12 transmits high intensity light 22 which impinges upon first end 224 of power fiber optic filament 215. Some high intensity light 23 is reflected at first end 224 of power fiber optic filament 215 and some high intensity light 22 is refracted at first end 224 of power fiber optic filament 215. Shield 261 is positioned to prevent reflected high intensity light 23 from impinging upon opto-electrical sensor 20, thereby preventing reflected light 23 from swamping out or interfering with optical signals 32. Refracted high intensity light 22 enters power fiber optic filament 215 at an angle which will cause total internal reflection of the light 22 at the boundary of the optical filament 215 so that refracted light 22 is propagated along power fiber optic filament 215 in a first direction 26 between first end 224 and second end 228. Light 22 exiting second end 228 of power fiber optic filament 215 is refracted by lens 46 to impinge upon opto-electrical detector 16. Opto-electrical detector 16 converts light 22 to electrical power.

Power line 29 electrically couples opto-electrical detector 16 to remote isolated circuit 30 which is powered by the electricity generated by opto-electrical detector 16. Remote isolated circuit 30 generates an electrical signal containing

information to be transmitted to local source circuit 36. Signal line 31 electrically couples remote isolated circuit 30 to optical signal generator 18 which generates optical signals 32 in response to electrical signals generated by remote isolated circuit 30. Illustratively optical signal generator 18 includes an LED 44. LED 44 is adjacent
 5 second end 227 of signal optic filament 217 so that the optical signals 32 generated impinge on second end 227 of signal fiber optic filament 217. Optical signals 32 propagate along signal fiber optic filament 217 exiting at first end 225 to impinge upon opto-electrical sensor 20.

Since high intensity light 22 and optical signals 32 are transmitted
 10 along different filaments 215, 217 and opto-electrical detector 220 is optically shielded from light source 12 and from high intensity light 23 reflecting from first end 224 of power fiber optic filament 215, there is no need to include a controller or memory elements to control the duty cycle of light 12 and optical signal generator 18 and store state data. It should also be noted that the illustrated embodiment of full-
 15 duplex, dual channel fiber optic isolation device 210 need not include an electrical storage device 38, because light source 12 can always remain on allowing light 22 to continually impinge upon opto-electrical detector 16 thereby providing an uninterrupted supply of power to remote isolated circuit 30. In the illustrated embodiment, full-duplex, dual channel fiber optic isolation device 210 is provided
 20 with electrical storage device 38 in order to provide a more stable power source for remote isolated circuit 30.

Referring to Fig. 4, a full-duplex, single channel optical isolation device 310 is illustrated. Full-duplex, single channel optical isolation device 310 includes a light source 12 such as a laser 48, an optical channel 14, an opto-electrical
 25 detector 16 such as a flat photocell 342, an optical signal generator 18 such as an LED 44, and an opto-electrical sensor 20 such as a photo-transistor 64. Illustratively, optical channel 14 is a rigid (non-fiber) optical connection 315 between isolated side 13 and source side 11, and includes an optical isolation layer 316 to prevent interference between LED 44 and laser 48. Other materials such as glass, plastic, or
 30 gas can be used to provide an optical path 14 between isolated side 13 and source side 11. Optical isolation layer 316 may be an opaque or non-transparent material such as black plastic, or may be a layer with a high impedance mismatch relative to optical

connection 315 to promote total reflection, or any other device that prevents penetration of light in the bandwidths of interest. In application, the entire device 310 can be located with the local source circuit 36, and remote isolated circuit 30 can be located elsewhere. Connection between remote isolated circuit 30, opto-electrical
5 detector 16, and optical signal generator 18 can be made by conventional wiring techniques such as power line 29 and signal line 31. Electrical isolation is still maintained in that there is no electrically conductive connection between remote isolated circuit 30 and local source circuit 36. Flat photovoltaic cell 342 or an array of cells is used to convert light energy to electrical energy. The electrical energy may be
10 stored prior to use in a storage device 38 (not shown in Fig. 4) and used later or may be directly used as described below.

In a hospital bed, where mains voltage 60 is used to power electric motors, pumps, or other actuators, local supply circuit 32 is located with device 310 near the high power components. Power and signal lines 29, 31 are routed away from
15 the higher power circuitry to remote isolated circuit 30 containing user interface 56 (not shown in Fig. 4) containing control switches located for example, in the side rails or foot board. Patients and caregivers are protected from potentially hazardous energies. Energy levels in the remote isolated circuit 30 and power and signal lines 29, 31 are limited to safe current and voltage levels. Because of the optical isolation,
20 there exists no surface which could provide a path for current flow between a patient or caregiver and the hazardous mains supply 60.

Referring to Fig. 7, a full-duplex, single channel optical fiber isolation device 410 is illustrated. Full-duplex, single channel optical fiber isolation device 410 includes a light source 412 generating light 422 having a bandwidth centered around a
25 first frequency corresponding to a first wavelength 419, a fiber optic filament 15 having a first end 24 and a second end 28, a lens 46 adjacent second end 28 of fiber optic filament 15, an opto-electrical detector 416 in optical communication with the second end 28 of fiber optic filament 15, an optical signal generator 418 for generating optical signals 432 having a bandwidth centered about a second frequency
30 corresponding to a second wavelength 435, and an optical sensor 420. Illustratively, light source 412 is a laser 48 which generates high intensity collimated monochromatic light 422 having the first wavelength 419. Laser light 422 impinges

upon first end 24 of fiber optic filament 15 at an angle resulting in some of laser light 423 being reflected while other of laser light 422 is refracted at first end 24. The angle of incidence of laser light 422 on first end 24 is such that refracted laser light 422 is totally internally reflected by side wall of fiber optic filament 15 and

5 propagated by fiber optic filament 15 between first end 24 and second end 28. At second end 28 laser light 422 is refracted by lens 46 so that laser light 422 impinges upon opto-electrical detector 416. Opto-electrical detector 416 is sensitive to light in a bandwidth including the first frequency corresponding to the first wavelength 419 and generates electricity when impinged upon by light within its sensitivity range.

10 Illustratively, opto-electrical detector 416 is a single curved photovoltaic cell 442. Laser light 422 entering fiber optic filament 15 at an angle of incidence to the longitudinal axis at first end 24 will exit from second end 28 in a conical annulus of light having the same angle as the angle of incidence. Lens 46 and the curvature of photovoltaic cell 442 cause the conical annulus of light to impinge

15 uniformly upon photovoltaic cell 442. While, such uniformity may not be critical when a single photovoltaic cell 442 is used in the invention it is beneficial when an array of photovoltaic cells are used in accordance with the invention. While only Fig. 7 illustrates that the photovoltaic cell is curved, the photovoltaic cells in isolation devices 110 and 210 may also be curved within the teaching of this disclosure.

20 Optical signal generator 418 is illustratively an LED 444 producing light in a bandwidth centered about a second frequency corresponding to second wavelength 435. Optical signals 432 centered about second wavelength 435 are refracted by lens 46 and transmitted along fiber optic filament 15 between second end 28 and first end 24. Optical signals 432 exit first end 24 of fiber optic filament and

25 impinge upon opto-electrical sensor 420.

Optical electrical sensor 420 is sensitive to light in a bandwidth including the second frequency corresponding to the second wavelength 435. Preferably opto-electrical sensor 420 has a sensitivity bandwidth which does not include the frequency corresponding to the first wavelength 419 of the reflected high

30 intensity light 423, so that opto-electrical sensor 420 detects only the optical signals 432 generated by optical signal generator 418. Alternatively, a filter (not shown) which filters out light having the first wavelength and allows substantial amounts of

light having the second wavelength to pass through could be placed over the junction of the photo-transistor 464 so that the response of opto-electrical detector 420 will be dictated by optical signals 432 and unaffected by reflected light 423.

- Although the invention has been described in detail with reference to
5 certain preferred embodiments, variations and modifications exist within the scope
and spirit of the invention as described and defined in the following claims.

10
15
20
25
30
35
40
45
50
55
60
65
70
75
80
85
90
95
100
105
110
115
120
125
130
135
140
145
150
155
160
165
170
175
180
185
190
195
200
205
210
215
220
225
230
235
240
245
250
255
260
265
270
275
280
285
290
295
300
305
310
315
320
325
330
335
340
345
350
355
360
365
370
375
380
385
390
395
400
405
410
415
420
425
430
435
440
445
450
455
460
465
470
475
480
485
490
495
500
505
510
515
520
525
530
535
540
545
550
555
560
565
570
575
580
585
590
595
600
605
610
615
620
625
630
635
640
645
650
655
660
665
670
675
680
685
690
695
700
705
710
715
720
725
730
735
740
745
750
755
760
765
770
775
780
785
790
795
800
805
810
815
820
825
830
835
840
845
850
855
860
865
870
875
880
885
890
895
900
905
910
915
920
925
930
935
940
945
950
955
960
965
970
975
980
985
990
995

Claims

What is claimed is:

1. An optical isolation device for transmitting power and signals
5 between a local source circuit and a remote isolated circuit, the optical isolation device comprising:
a light source for generating light;
an optical channel having a first end on which the light impinges and a second end optically coupled to the first end;
10 an opto-electrical detector adjacent the second end producing electrical power when impinged upon by the light;
an optical signal generator powered by the electrical power generated by the opto-electrical detector and coupled to a remote isolated circuit, the optical signal generator generating optical signals in response to input provided by the remote
15 isolated circuit, the optical signals impinging upon the second end of the optical channel;
an opto-electrical sensor adjacent the first end of the optical channel generating electrical signals in response to the optical signals; and
wherein the light and optical signals are both propagated through the
20 optical channel.
2. The apparatus of claim 1 wherein the optical channel includes a fiber optic filament.
3. The apparatus of claim 1 and further comprising a controller coupled to the light source and optical signal generator controlling the generation of
25 the light and optical signals.
4. The apparatus of claim 2 and further comprising a lens adjacent the second end of the optical channel, the lens refracting both the optical signal and the light.
5. The apparatus of claim 1 wherein the opto-electrical detector
30 includes a photovoltaic cell.
6. The apparatus of claim 1 wherein the opto-electrical detector includes an array of photonic devices.

7. The apparatus of claim 6 wherein the photonic devices are photovoltaic cells.

8. The apparatus of claim 7 and further comprising a lens adjacent the second end of the optical channel, the lens refracting both the optical signal and
5 the light.

9. The apparatus of claim 3 wherein the controller induces the light source to generate light in pulses having an on time and an off time and induces the optical signal generator to generate optical signals during the off time of the light.

10. The apparatus of claim 9 and also comprising an electrical
10 storage device electrically coupled to the opto-electrical detector.

11. The apparatus of claim 1 wherein the intensity of the light source and the sensitivity of the opto-electrical detector are sufficient to satisfy the power needs of the remote isolated circuit and optical signal generator.

12. The apparatus of claim 1 wherein the light source generates
15 light in a bandwidth centered about a first frequency, the opto-electrical detector is sensitive in a bandwidth including the first frequency, the optical signal generator generates optical signals in a bandwidth centered about a second frequency, and the opto-electrical sensor is sensitive in a band width including the second frequency.

13. The apparatus of claim 12 wherein the light source generates
20 monochromatic light.

14. The apparatus of claim 13 wherein the opto-electrical sensor is not sensitive to the monochromatic light.

15. The apparatus of claim 12 wherein the opto-electrical sensor is not sensitive to light in the bandwidth centered about the first frequency.

25 16. The apparatus of claim 12 wherein the light source is a laser.

17. The apparatus of claim 16 wherein the laser is a semiconductor laser.

18. The apparatus of claim 16 wherein the optical signal generator includes a light emitting diode.

30 19. The apparatus of claim 12 wherein the light source has a narrow bandwidth.

20. / An opto-electric device comprising

a first circuit including a first light source;
a second circuit including a second light source and a photovoltaic cell
configured to provide energy to at least a portion of the second circuit; and
a fiber optic line optically coupled to the first and second circuits, light
5 from the first light source being transmittable to the photovoltaic cell over the fiber
optic line, and light from the second light source being transmittable to the first circuit
over the fiber optic line.

21. The device of claim 20, wherein the first light source
periodically changes between an on state and an off state and light from the second
10 light source is receivable by the first circuit when the first light source is in the off
state.

22. The device of claim 21, wherein light from the second light
source provides feedback to the first circuit regarding a condition in the second
circuit.

15 23. The device of claim 21, wherein the second light source has an
on state and an off state and the first circuit includes a detector configured to detect
the state of the second light source when the first light source is in the off state.

24. The device of claim 20, wherein light from the first light source
has a higher intensity than light from the second light source.

20 25. The device of claim 20, further comprising a storage device and
the photovoltaic cell provides energy to the storage device.

26. The device of claim 25, wherein the storage device comprises a
battery.

25 27. The device of claim 25, wherein the storage device comprises a
capacitor.

28. The device of claim 20, further comprising a lens positioned
adjacent an end of the fiber optic line so that light from the first light source passes
through the lens prior to reaching the photovoltaic cell.

29. The device of claim 28, wherein the lens is configured to
30 disperse the light from the first light source.

30. The device of claim 28, wherein the second light source is
positioned to lie between the lens and the photovoltaic cell.

31. The device of claim 20, wherein the fiber optic line includes a single fiber optic strand.

32. The device of claim 20, wherein the fiber optic line includes plural fiber optic strands.

5 33. An opto-electric device, comprising:
a first circuit including a first light source;
a second circuit including a second light source and a photovoltaic cell configured to provide energy to at least a portion of the second circuit; and
a first optical channel optically coupled to the first and second circuits,
10 light from the first light source being transmittable to the photovoltaic cell over the optical channel.

34. The device of claim 33, wherein the first light source periodically changes between an on state and an off state and light from the second light source is receivable by the first circuit when the first light source is in the off
15 state.

35. The device of claim 34, wherein light from the second light source provides feedback to the first circuit regarding a condition in the second circuit.

36. The device of claim 34, wherein the second light source has an
20 on state and an off state and the first circuit includes a detector configured to detect the state of the second light source when the first light source is in the off state.

37. The device of claim 33, wherein the second circuit further comprises a storage device, and the photovoltaic cell provides energy to the storage device.

25 38. The device of claim 37, wherein the storage device comprises a battery.

39. The device of claim 37, wherein the storage device comprises a capacitor.

40. The device of claim 33, further comprising a lens positioned
30 adjacent an end of the first optical channel so that light from the first light source passes through the lens prior to reaching the photovoltaic cell.

41. The device of claim 40, wherein the lens is configured to disperse the light from the first light source.

42. The device of claim 40, wherein the second light source is positioned to lie between the lens and the photovoltaic cell.

5 43. The device of claim 33, wherein the first optical channel includes a single fiber optic strand.

44. The device of claim 33, wherein the first optical channel includes plural fiber optic strands.

45. The device of claim 33, further including a second optical
10 channel optically coupled to the first and second circuits, light from the second light source being transmittable over the second optical channel.

46. The device of claim 45, wherein light from the second light source provides feedback to the first circuit regarding a condition in the second circuit.

15 47. The device of claim 46, wherein the second circuit further comprises a storage device, and the photovoltaic cell provides energy to the storage device.

48. The device of claim 47, wherein the storage device comprises a battery.

20 49. The device of claim 47, wherein the storage device comprises a capacitor.

50. The device of claim 45, further comprising a lens positioned adjacent an end of the first optical channel so that light from the first light source passes through the lens prior to reaching the photovoltaic cell.

25 51. The device of claim 50, wherein the lens is configured to disperse the light from the first light source.

52. The device of claim 33, wherein the first optical channel comprises:

a first region optically coupling the first light source to the photovoltaic cell; and

a second region optically coupling the second light source to the first circuit.

53. The device of claim 52, further comprising an isolation layer interposed between the first and second regions, the isolation layer preventing optical communication between the first and second regions.

54. The device of claim 53, wherein the isolation layer is an optically non-transparent material.

55. The device of claim 53, wherein the isolation layer has an impedance mismatch with the first and second regions whereby optical communication between the first and second regions is prevented.

56. The device of claim 53, wherein light from the second light source provides feedback to the first circuit regarding a condition in the second circuit.

57. The device of claim 56, wherein the second circuit further comprises a storage device, and the photovoltaic cell provides energy to the storage device.

58. The device of claim 57, wherein the storage device comprises a battery.

59. The device of claim 57, wherein the storage device comprises a capacitor.

~~60.~~ A method of electrically isolating a remote circuit from a source circuit, the method comprising the steps of:
generating a first light signal in the source circuit;
optically coupling the first light signal to the source circuit so that the remote circuit receives the first light signal from the source circuit;
generating power in the remote circuit from the first light signal received by the remote circuit;
powering the remote circuit by the generated power;
generating a second light signal in the remote circuit; and
optically coupling the second light signal to the source circuit so that the source circuit receives the second light signal from the remote circuit.

61. The method of claim 60, wherein power is generated by the first light signal impinging a photovoltaic cell in the remote circuit.

62. The method of claim 60, wherein the first and second light signals are optically coupled over a single optical channel.

63. The method of claim 62, further comprising the step of communicating the first light signal and the second light signal in a half-duplex mode.

64. The method of claim 63, wherein the step of communication the first and second light signals in half-duplex mode comprises the steps of:

communicating the first light signal according to a duty cycle having an on state and an off state; and

communicating the second light signal during the off state of the duty cycle.

65. The method of claim 62, further comprising the step of communicating the first light signal and second light signal in full-duplex mode.

66. The method of claim 65, wherein the step of communicating the first and second light signals in full-duplex mode comprises the steps of:

selecting a first frequency for the first light source;

selecting a second frequency for the second light source, the second frequency not equal to the first frequency;

selecting a photovoltaic cell responsive to the first frequency; and

selecting an opto-electrical sensor responsive to the second frequency.

67. The method of claim 60, wherein the first light signal is communicated over a first optical channel and the second light signal is communicated over a second optical channel.

68. The method of claim 67, wherein the first and second light signals are communicated in a full-duplex mode.

69. The method of claim 68, further comprising the step of optically shielding the first and second optical channels whereby optical communication between the first and second optical channels is prevented.

ABSTRACT

Optical Isolation Apparatus And Method

Optical isolation device (10) optically couples and electrically isolates various components on a local source circuit (36) from components on a remote isolated circuit (30). Light source (12) is coupled to opto-electrical detector (16) and opto-electrical sensor (20) is coupled to optical signal generator (18) by optical channel (14). The opto-electrical detector (16) is electrically coupled to remote isolated circuit (30) which is powered by the electricity generated by opto-electrical detector (16) in response to being impinged upon by light (22). Remote isolated circuit (30) is also electrically coupled to optical signal generator (18) which generates optical signals (32) in response to electrical signals received from remote isolated circuit (30). Opto-electrical sensor (20) produces electrical signals in response to being impinged upon by optical signals (32). Thus, remote isolated circuit (30) is completely electrically isolated from, but in communication with and powered by, local source circuit (36).


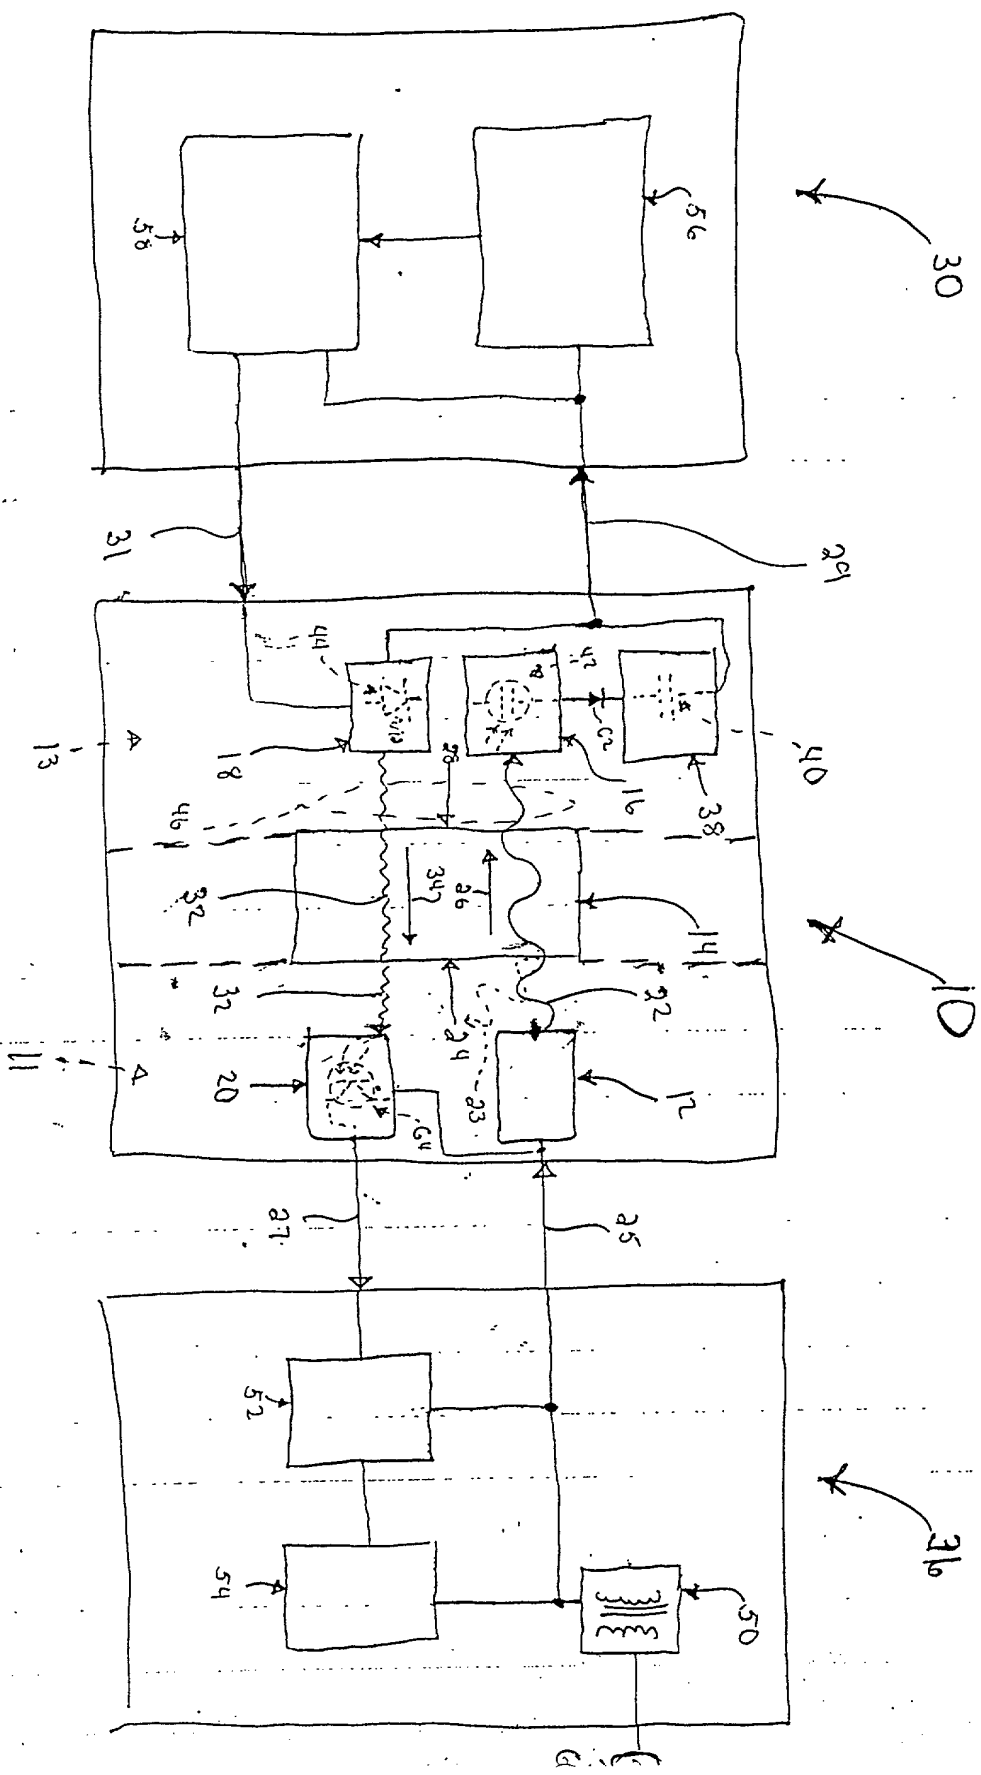


Fig. 1

FIG. 1 is a schematic diagram of a power supply system, showing a transformer 14, a rectifier 20, a filter 22, a regulator 24, a load 26, a switch 28, a control 30, a feedback 32, a reference 34, a sense 36, a sense 38, a sense 40, a sense 42, a sense 44, a sense 46, and a sense 48.

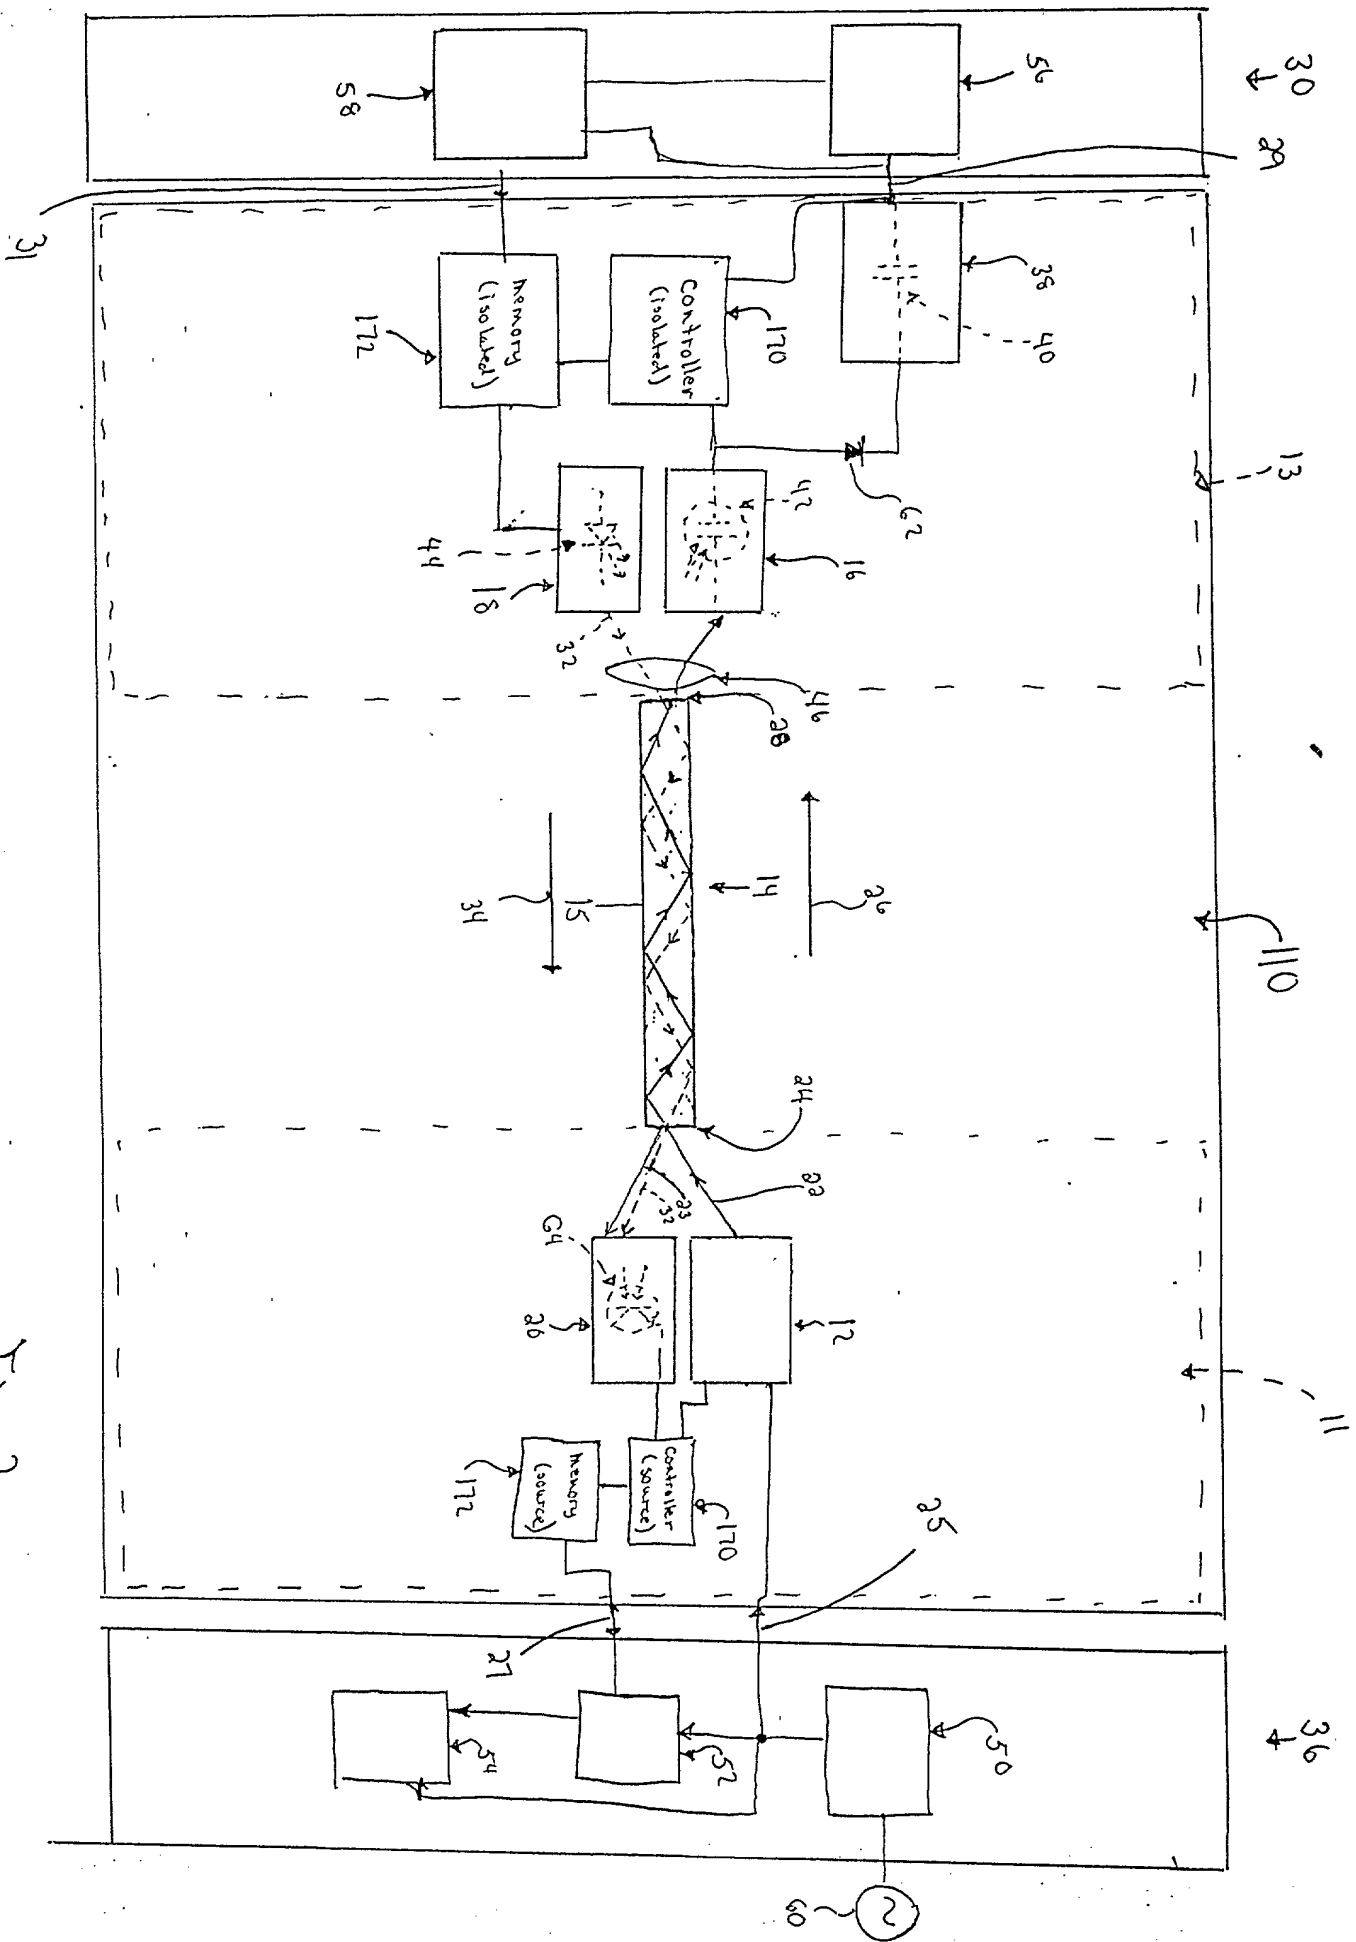

2021

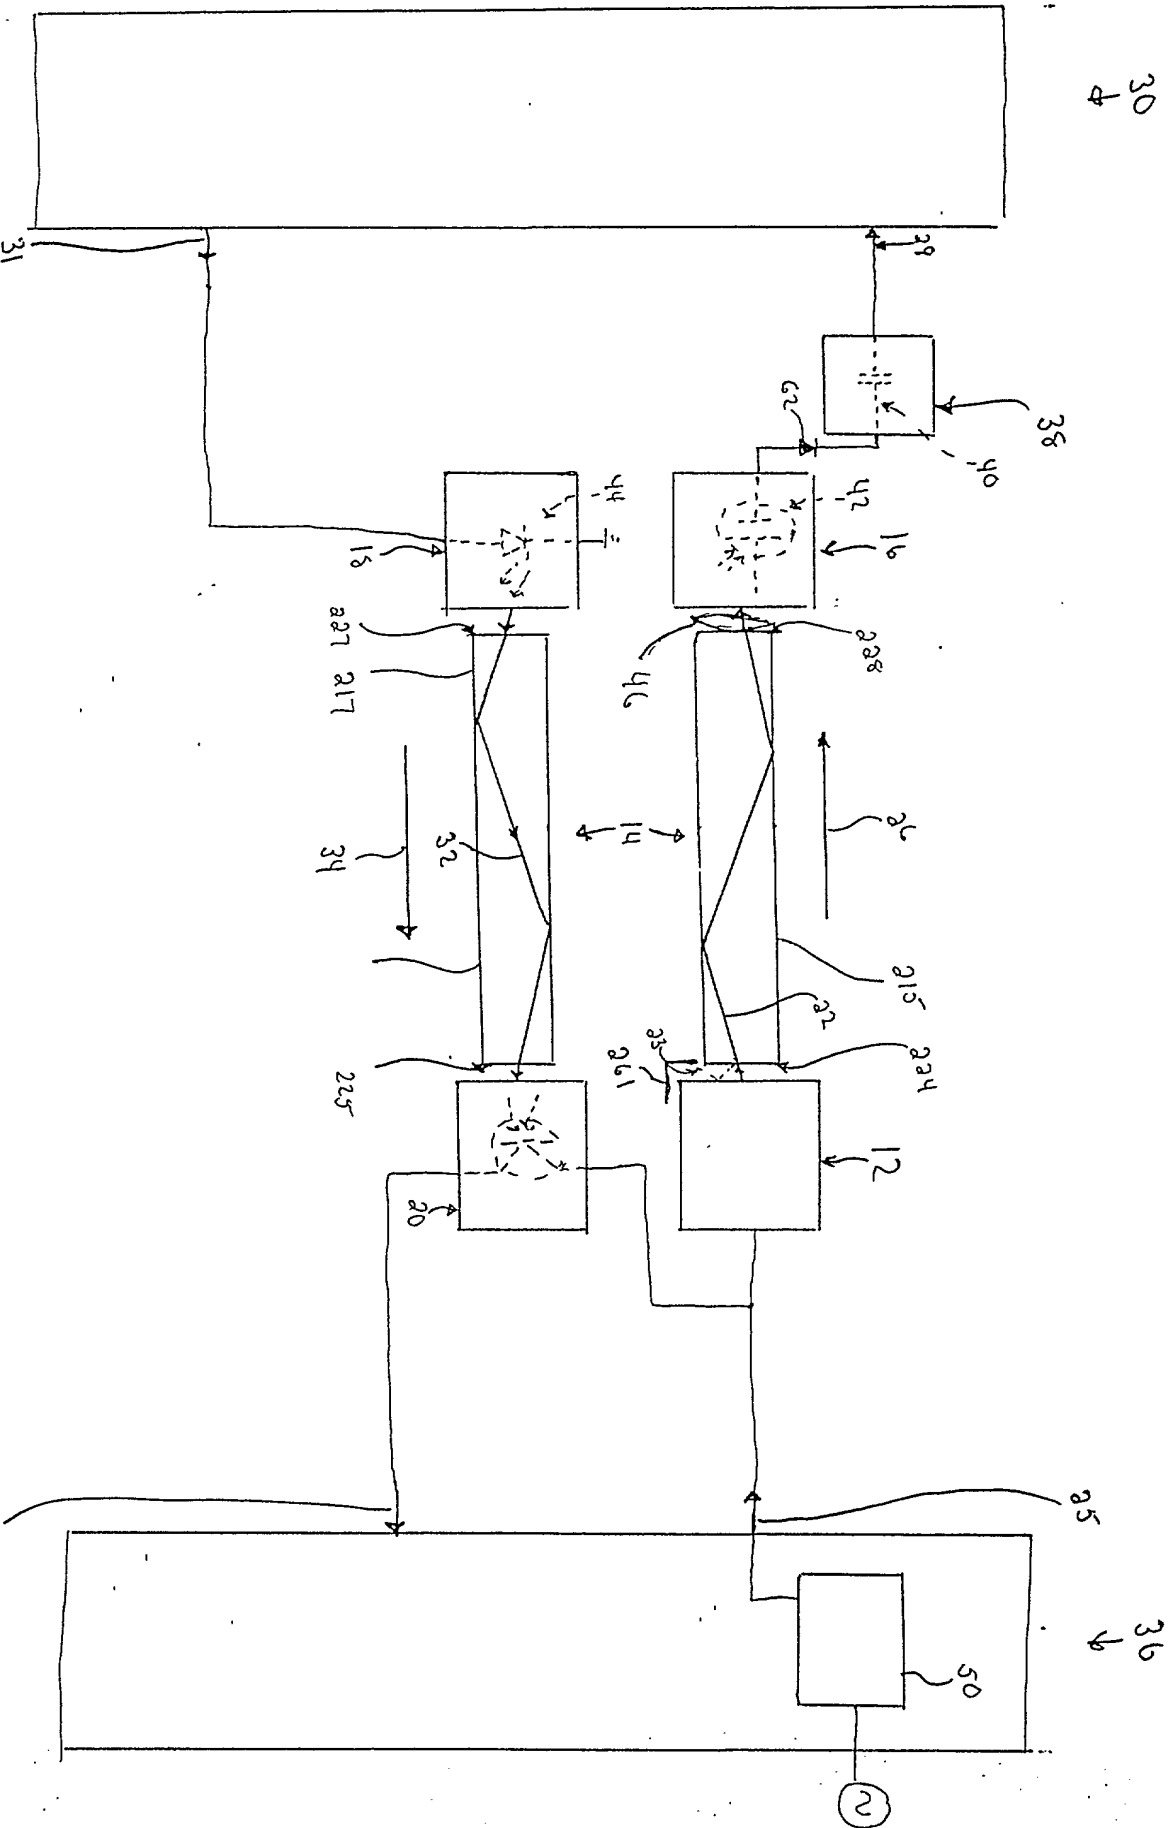


Fig. 3

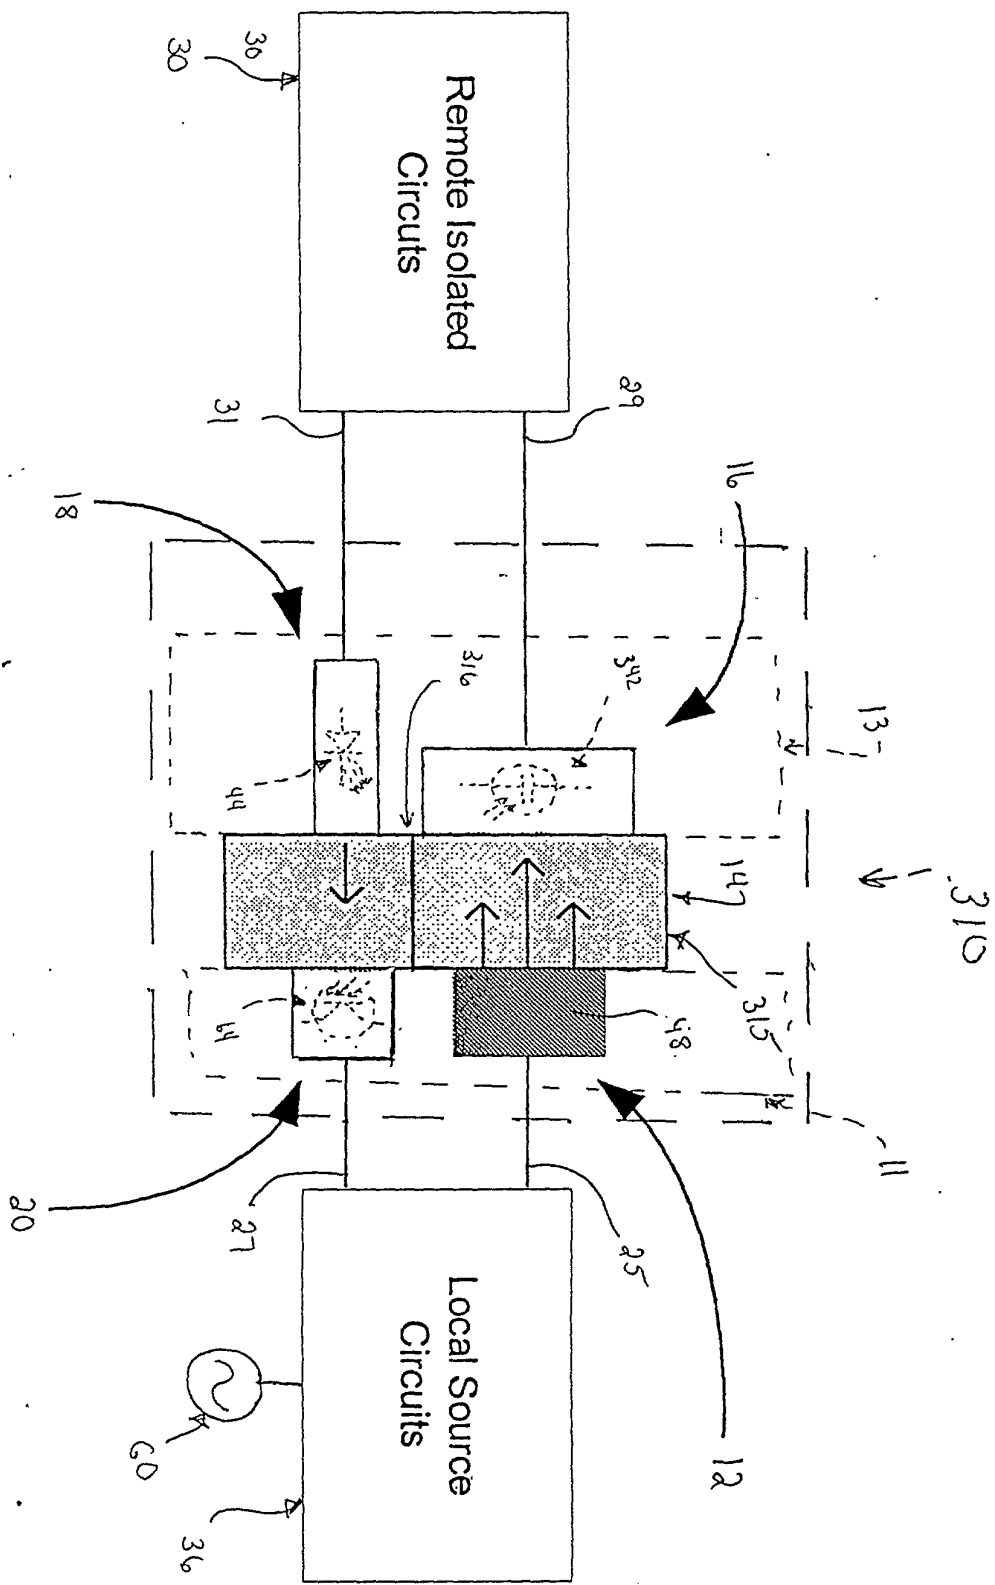


Fig. 4.

FIG. 4 is a block diagram of a system in accordance with the present invention. The system includes a local source circuit 20 and a remote isolated circuit 30. The local source circuit 20 is connected to a central interface 11 via lines 25 and 27. The remote isolated circuit 30 is connected to the central interface 11 via lines 29 and 31. The central interface 11 includes a central shaded block 14, a smaller shaded block 48, and two circular components 44 and 46. Various signal lines and labels are shown, including 12, 16, 18, 13, 310, 315, 342, 346, and 36.

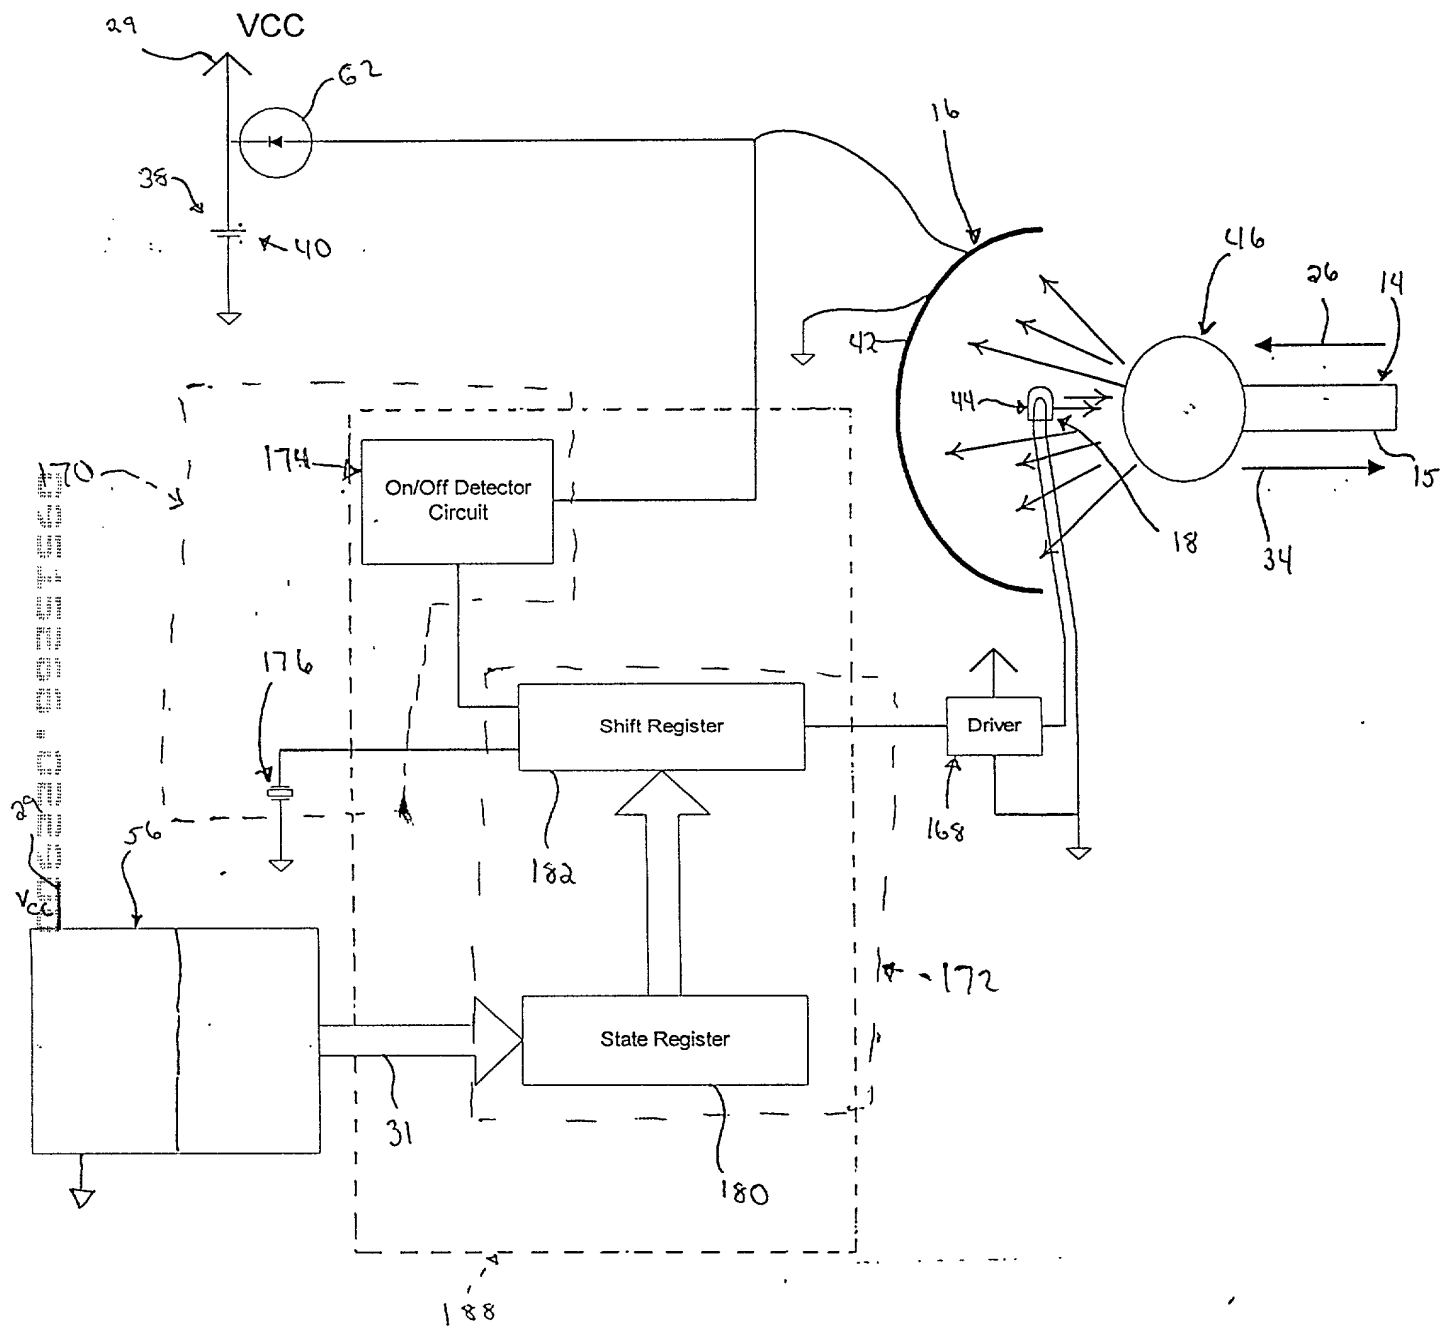


Fig. 5


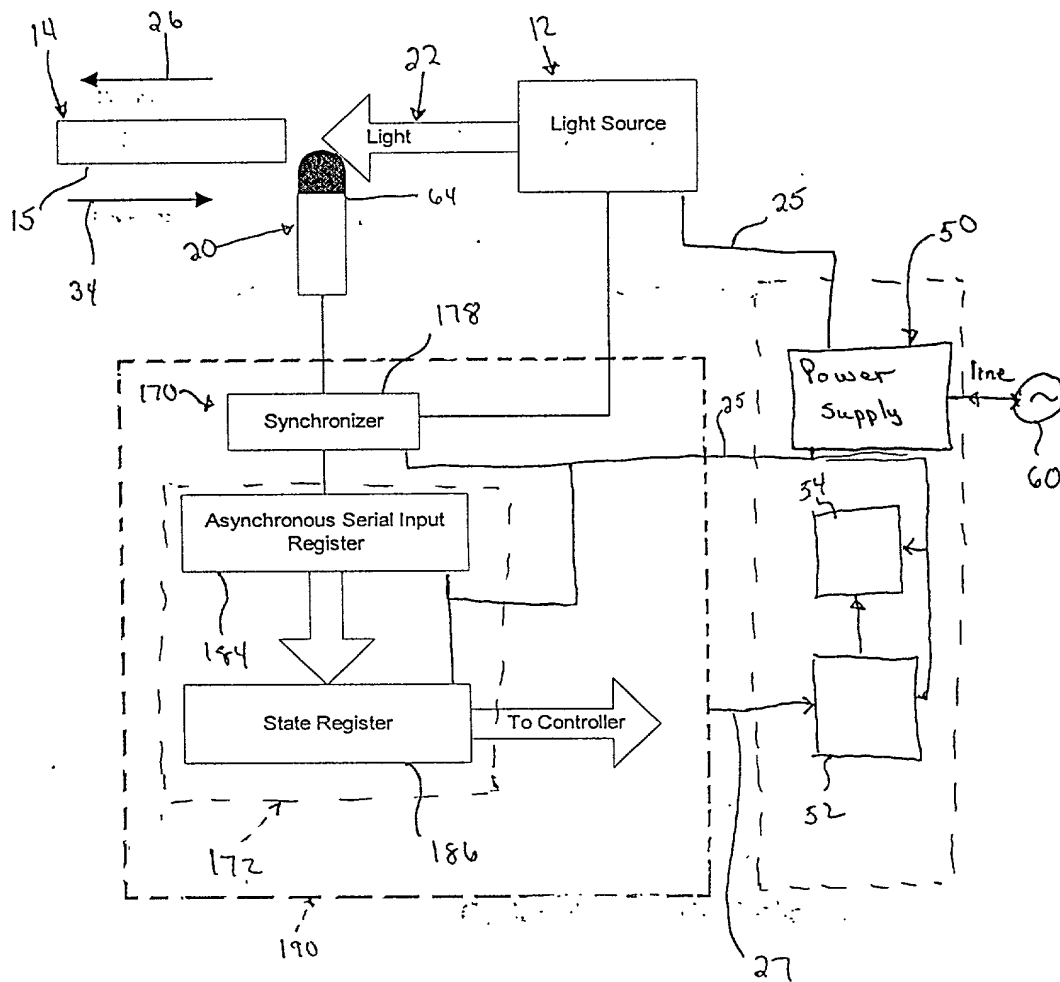


Fig. 6

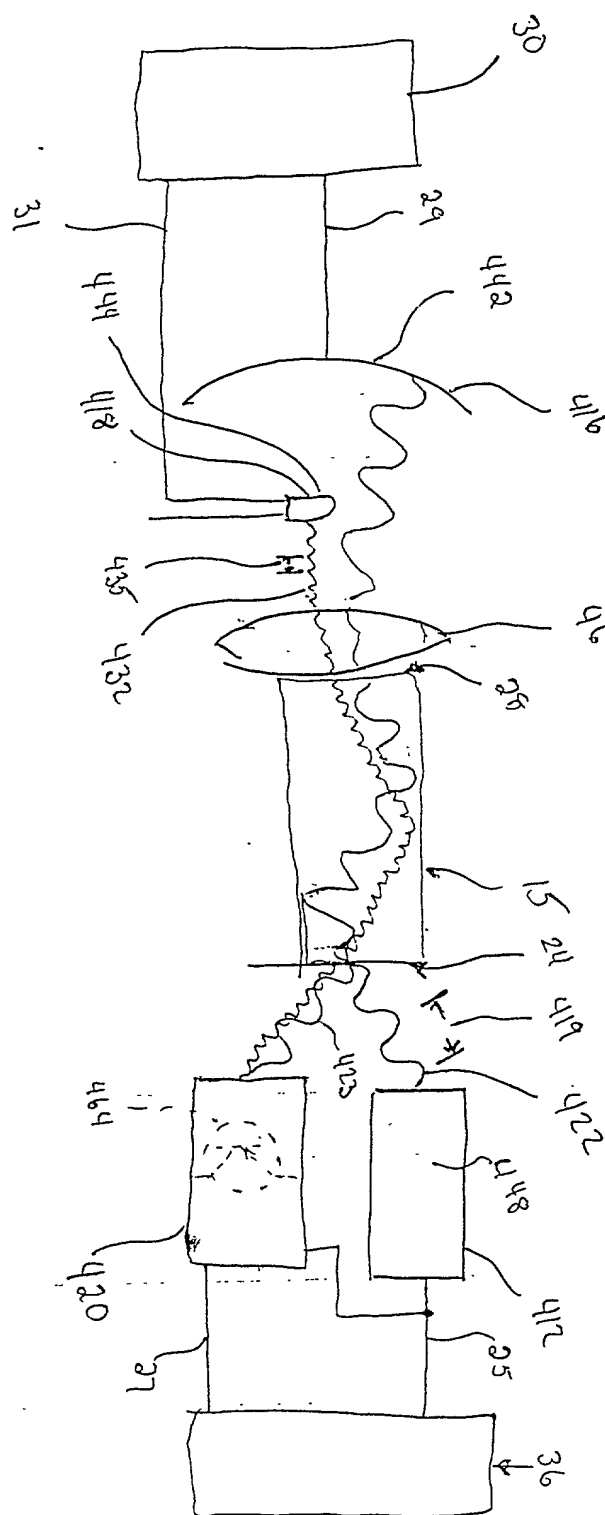

25.1

Attorney Docket No.: 08266-0197**DECLARATION AND POWER OF ATTORNEY -- PATENT APPLICATION**

As below named inventor, I hereby declare that I believe I am the original, first and sole inventor (*if only one name is listed below*) or an original, first and joint inventor (*if plural names are listed below*) of the subject matter which is claimed and for which a patent is sought in the application entitled: OPTICAL ISOLATION APPARATUS AND METHOD
the specification of which

(check one) X is attached hereto
_____ was filed on _____ as
United States Application Serial No. _____ or
PCT International Application No. _____
and was amended on _____ (*if applicable*).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to herein.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet attached hereto.

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet attached hereto.

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (<i>If applicable</i>)

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet attached hereto.

As a named inventor, I hereby appoint James A. Coles, Reg. No. 28,291; E. Victor Indiano, Reg. No. 30, 143; Timothy E. Niednagel, Reg. No. 33,266; R. Trevor Carter, Reg. No. 40,549; Jeffery B. Huter, Reg. No. 41,086; Anthony P. Filomena, Reg. No. 44,108; Norman J. Hedges, Reg. No. 44,151; and Paul E. Franz, Reg. No. P45,910; as attorneys of record, and William S. Meyers, Reg. No. 42,884 as agent of record, with full power of substitution and revocation, to prosecute this application, and to transact all business in the Patent and Trademark Office connected therewith, and I specify that communications regarding the application be directed to:

Intellectual Property Group
Bose McKinney & Evans LLP
135 North Pennsylvania Street, Suite 2700
Indianapolis, Indiana 46204
Telephone: (317) 684-5000
Facsimile: (317) 684-5173

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Joint Inventor

Country of Citizenship

Inventor's signature

Date

Residence and Post Office Address

267990